
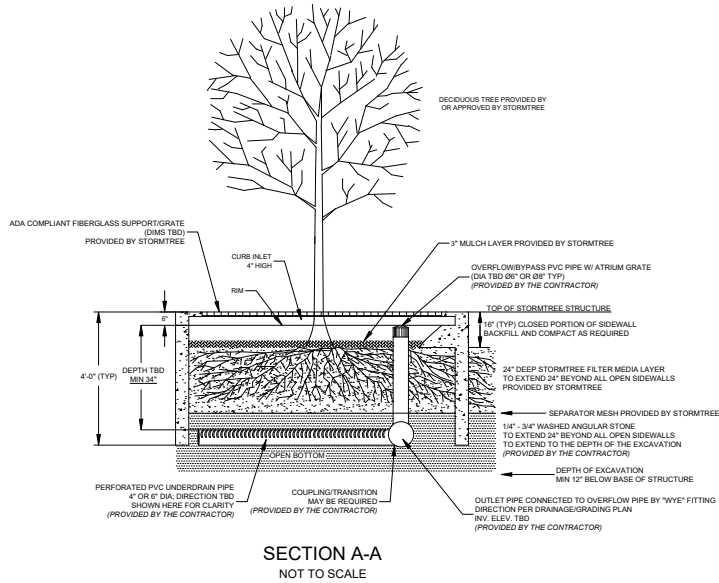


NOT A CONSTRUCTION DETAIL

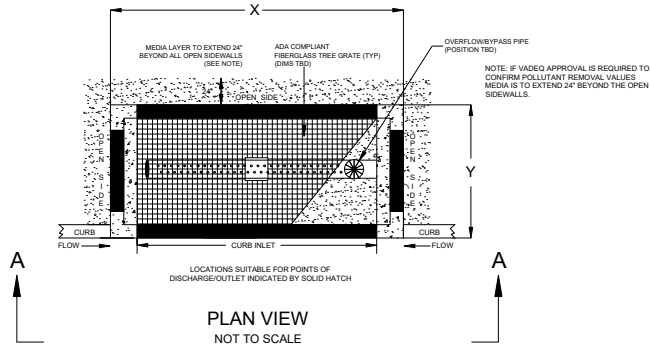

STANDARD SIZES						
MODEL	X	Y	MEDIA BAY	TREATMENT VOLUME RATE (ACRES)	TREATMENT FLOW RATE (GPM)	MAX OUTLET PIPE (DIA)
ST-4X4F	5	5	4' X 4'	UP TO 0.09	0.052	4"
ST-6X4F	7	5	4' X 6'	UP TO 0.14	0.077	4"
ST-4X6F	5	7	4' X 6'	UP TO 0.15	0.080	4"
ST-8X4F	9	5	8' X 4'	UP TO 0.19	0.103	4"
ST-4X8F	5	9	4' X 8'	UP TO 0.21	0.111	4"
ST-6X6F	7	7	6' X 6'	UP TO 0.22	0.116	4"
ST-10X4F	11	5	10' X 4'	UP TO 0.24	0.128	6"
ST-15X4F	16	5	16' X 5'	UP TO 0.36	0.190	6"
ST-12X6F	13	7	13' X 7'	UP TO 0.43	0.225	6"
ST-13X7F	14	8	7' X 13'	UP TO 0.54	0.286	6"

* BASED ON 3 OPEN SIDES- 4 OPEN SIDES TO HAVE GREATER FLOW/VOLUME TREATMENT RATES
 BASED ON C-0.85 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE
 CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
 SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY; CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL.

STORMTREE_®
FULL THROAT SERIES
W/ INTERNAL BYPASS

STORMTREE_®

Thinking Outside the Concrete Box.

24 Corliss Street, Suite 9092, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE. AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,303,885; 10,661,360; OTHER PATENTS PENDING.