
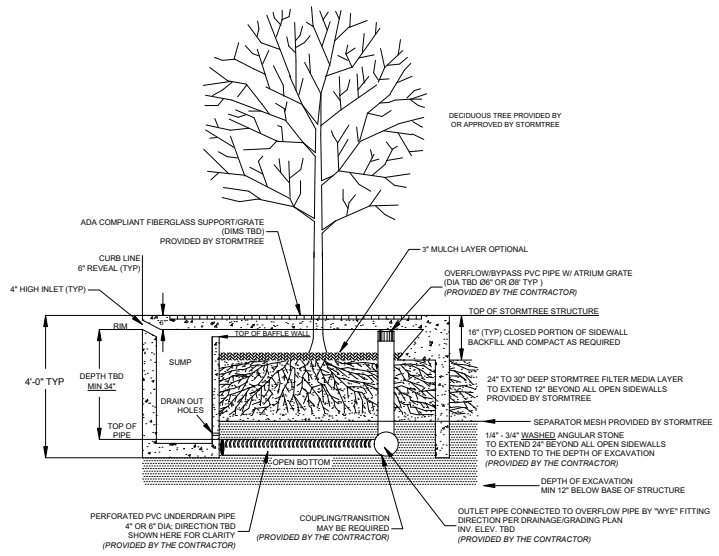


NOT A CONSTRUCTION DETAIL

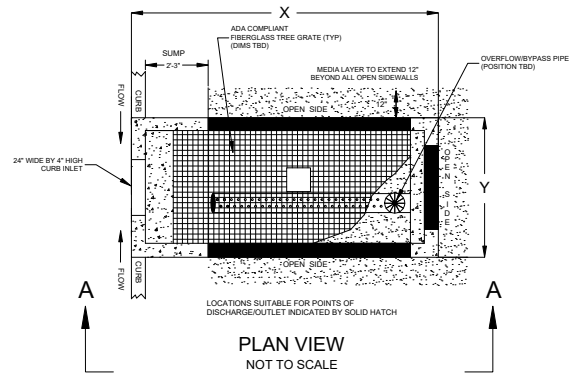

STANDARD SIZES						
MODEL	X	Y	MEDIA BAY	RECOMMENDED CATCHMENT DRAINAGE AREA	TREATMENT FLOW RATE (CFS)	MAX UNDERDRAIN PIPE (DIA)
ST-6X4SUS	10	5	4' X 6'	UP TO 0.23	0.082	4"
ST-8X4SUS	12	5	4' X 6'	0.24-0.29	0.118	4"
ST-10X4SUS	14	5	4' X 10'	0.30-0.35	0.139	6"
ST-12X4SUS	16	5	4' X 12'	0.36-0.41	0.157	6"

BASED ON 3 OPEN SIDES
TREATMENT FLOW RATES BASED ON C-0.95 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE
CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY
CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL

STORMTREE
INTERNAL SUMP SERIES
CURB ENTRY (SHORT SIDE)
W/ INTERNAL BYPASS

STORMTREE
Thinking Outside the Concrete Box.

24 Corliss Street, Suite 9092, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE, AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,886; 11,663,362; OTHER PATENTS PENDING.