
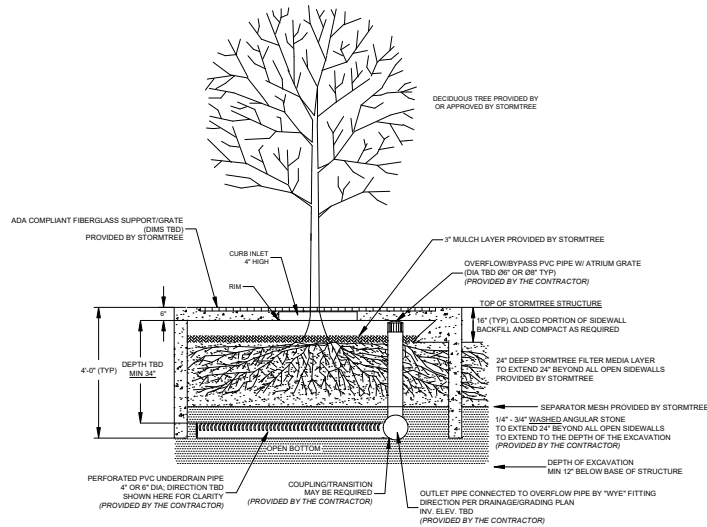


NOT A CONSTRUCTION DETAIL

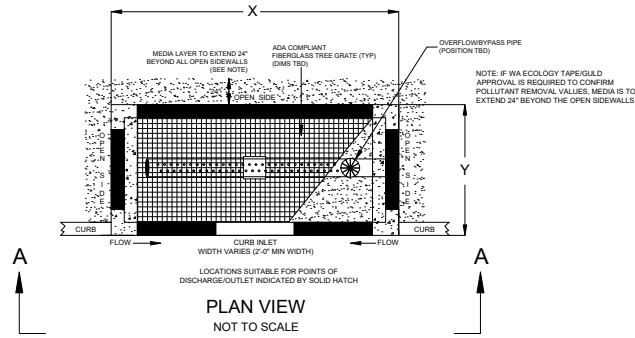

STANDARD SIZES						
MODEL	X	Y	MEDIA BAY	TREATMENT VOLUME RATE (ICF/S)	TREATMENT FLOW RATE (CF/S)	MAX OUTLET PIPE (DIA)
ST-4X4	5	5	4' X 4'	UP TO .09	0.062	4"
ST-6X4	7	5	4' X 6'	UP TO 0.14	0.077	4"
ST-4X6	5	7	4' X 6'	UP TO 0.15	0.080	4"
ST-8X4	9	5	8' X 4'	UP TO 0.19	0.103	4"
ST-4X8	5	9	4' X 8'	UP TO 0.21	0.111	4"
ST-6X6	7	7	6' X 6'	UP TO 0.22	0.116	4"
ST-10X4	11	5	10' X 4'	UP TO 0.24	0.128	6"
ST-15X4	16	5	16' X 5'	UP TO 0.36	0.190	6"
ST-12X6	13	7	13' X 7'	UP TO 0.43	0.225	6"
ST-13X7	14	8	7' X 13'	UP TO 0.54	0.298	6"

*BASED ON 3 OPEN SIDES, 4 OPEN SIDES TO HAVE GREATER FLOW/VOLUME TREATMENT RATES BASED ON C/O OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY; CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL.

STORMTREE®
BASE SERIES
W/ INTERNAL BYPASS

STORMTREE®
Thinking Outside the Concrete Box.

24 Corlies Street, Suite 9002, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE. AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,885; US 8,653,392; OTHER PATENTS PENDING.