
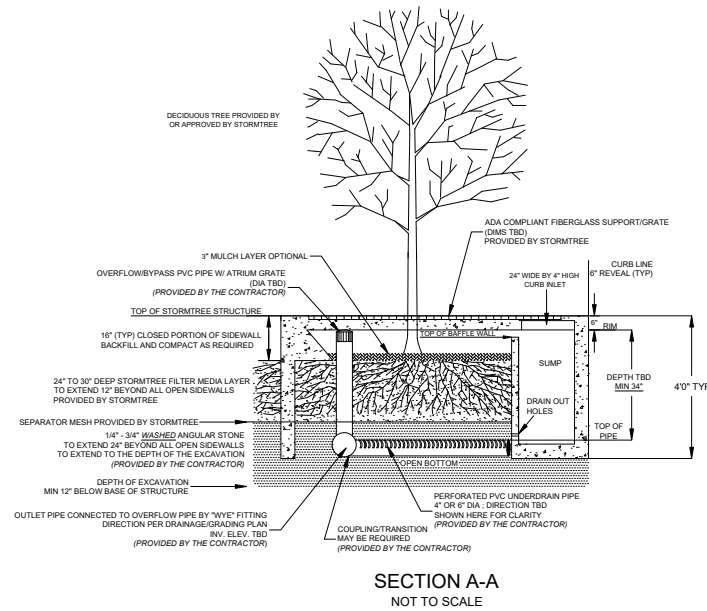


NOT A CONSTRUCTION DETAIL

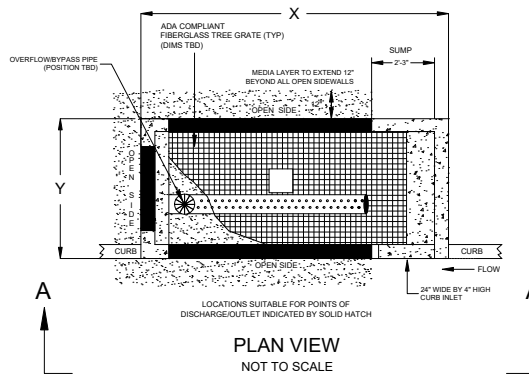

STANDARD SIZES

MODEL	X	Y	MEDIA BAY	RECOMMENDED CATCHMENT DRAINAGE AREA*	TREATMENT FLOW RATE (CFD)	MAX UNDERDRAIN PIPE (DIA)
ST-4X4SUR	10	5	4' X 6'	UP TO 0.23	0.082	4"
ST-4X6SUR	12	5	4' X 8'	0.24-0.29	0.118	4"
ST-10X6SUR	14	5	4' X 10'	0.30-0.35	0.139	6"
ST-12X6SUR	16	5	4' X 12'	0.36-0.41	0.157	6"

*BASED ON 3 OPEN SIDES
TREATMENT FLOW RATES BASED ON C=0.95 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY
CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL

STORMTREE[®]
INTERNAL SUMP SERIES
CURB ENTRY (RIGHT SIDE)
W/ INTERNAL BYPASS

STORMTREE[®]

Thinking Outside the Concrete Box.

24 Corliss Street, Suite 9002, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE, AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,896; 10,363,392; OTHER PATENTS PENDING.