
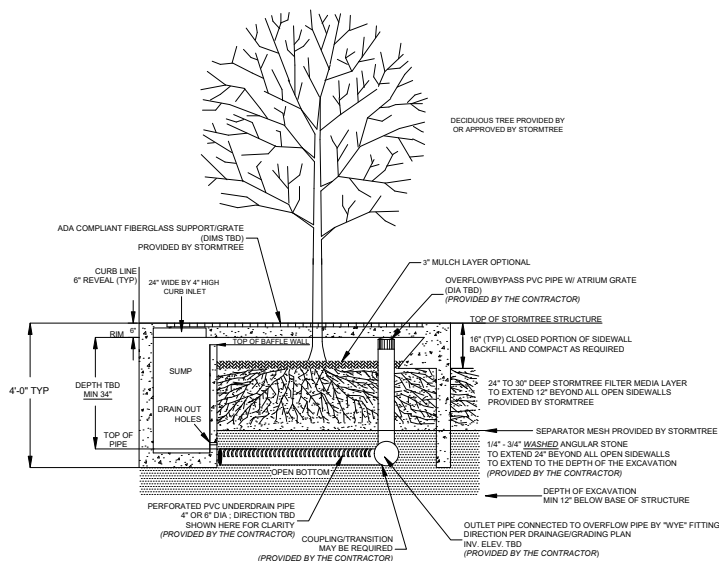


NOT A CONSTRUCTION DETAIL

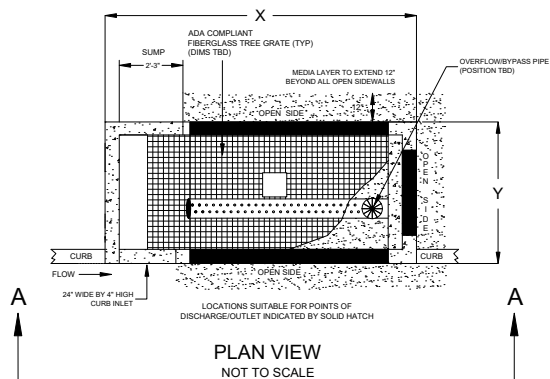

STANDARD SIZES						
MODEL	X	Y	MEDIA BAY	RECOMMENDED CATCHMENT DRAINAGE AREA*	TREATMENT FLOW RATE (CFS)	MAX UNDERDRAIN PIPE (DIA)
ST-8X4SUL	10	5	4' X 6'	UP TO 0.23	0.082	4"
ST-8X4SUL	12	5	4' X 8'	0.24-0.29	0.118	4"
ST-10X4SUL	14	5	4' X 10'	0.30-0.35	0.139	6"
ST-12X4SUL	16	5	4' X 12'	0.36-0.41	0.157	6"

* BASED ON 3' OPEN SIDES
TREATMENT FLOW RATES BASED ON C-0.95 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE
CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
SIZING TABLE INTENDED FOR PLANNING LEVEL. USE ONLY
CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL

STORMTREE[®]
INTERNAL SUMP SERIES
CURB ENTRY (LEFT SIDE)
W/ INTERNAL BYPASS

STORMTREE[®]

Thinking Outside the Concrete Box.[™]

24 Corlies Street, Suite 9092, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE, AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,885; 10,263,392; OTHER PATENTS PENDING.