
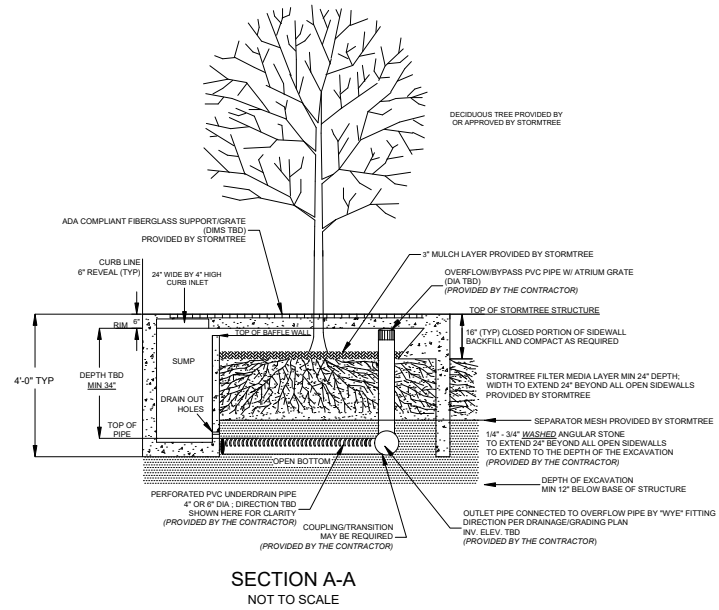


NOT A CONSTRUCTION DETAIL

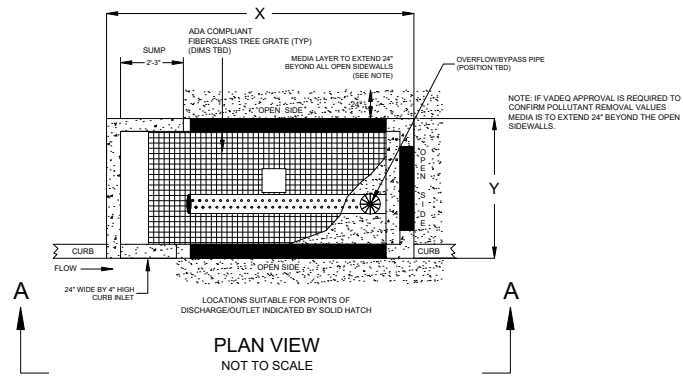

STANDARD SIZES

MODEL	X	Y	MEDIA BAY (ACRF) ¹	TREATMENT VOLUME RATE (GPM) ²	TREATMENT FLOW RATE (CFD) ²	MAX OUTLET PIPE (DIA)
ST-6X4SUL	10	5	4' X 6'	UP TO 0.15	0.060	4"
ST-8X4SUL	12	5	4' X 8'	UP TO 0.20	0.108	4"
ST-10X4SUL	14	5	4' X 10'	UP TO 0.26	0.136	4"
ST-12X4SUL	16	5	4' X 12'	UP TO 0.31	0.164	6"

¹ BASED ON 3 OPEN SIDES; 4 OPEN SIDES TO HAVE GREATER FLOW/VOLUME TREATMENT RATES
² BASED ON C 0.35 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE
 CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
 SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY; CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL.

STORMTREE[®]
INTERNAL SUMP SERIES
CURB ENTRY (LEFT SIDE)
W/ INTERNAL BYPASS

STORMTREE[®]



Thinking Outside the Concrete Box.

24 Corliss Street, Suite 9092, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE, AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,885; 10,363,392; OTHER PATENTS PENDING.