
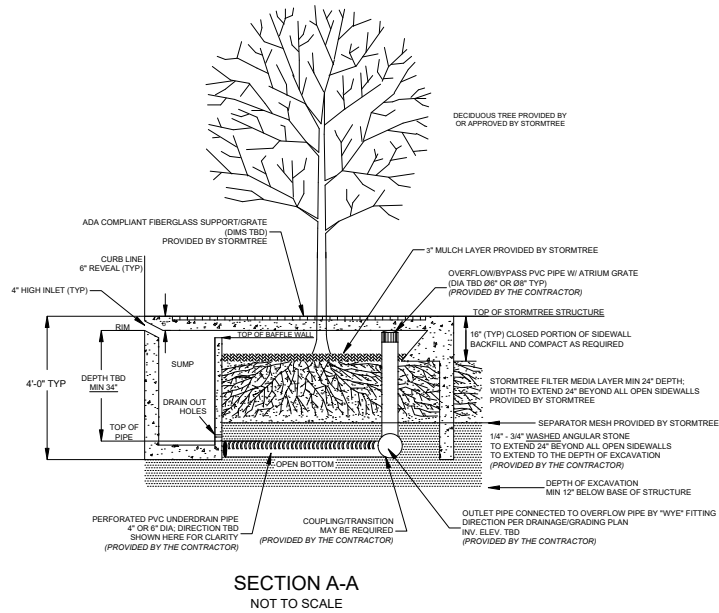


NOT A CONSTRUCTION DETAIL

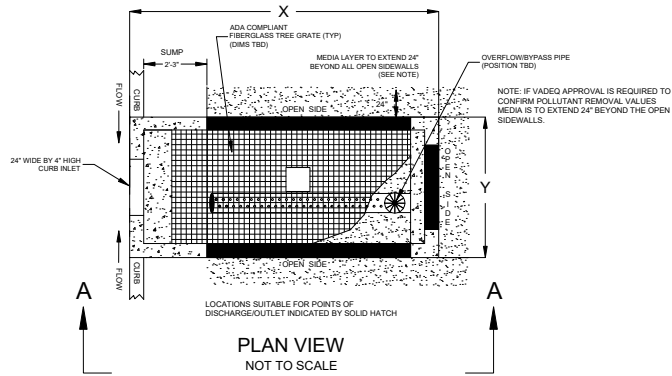

STANDARD SIZES

MODEL	X	Y	MEDIA BAY	TREATMENT VOLUME RATE (ACRE) ¹	TREATMENT FLOW RATE (CFS) ²	MAX OUTLET PIPE (DIA)
ST-4X4SUS	10	5	4' X 6'	UP TO 0.15	0.080	4"
ST-4X6SUS	12	5	4' X 8'	UP TO 0.20	0.106	4"
ST-10X4SUS	14	5	4' X 10'	UP TO 0.26	0.136	4"
ST-12X4SUS	16	5	4' X 12'	UP TO 0.31	0.164	6"

¹ BASED ON 3 OPEN SIDES; 4 OPEN SIDES TO HAVE GREATER FLOW/VOLUME TREATMENT RATES BASED ON C-0.95 OR CATCHMENTS WITH MAXIMUM IMPERVIOUS SURFACE
CONTACT STORMTREE FOR ADDITIONAL DIMENSIONS
SIZING TABLE INTENDED FOR PLANNING LEVEL USE ONLY; CONTACT STORMTREE PRIOR TO FINAL PLAN SUBMITTAL

STORMTREE_®
INTERNAL SUMP SERIES
CURB ENTRY (SHORT SIDE)
W/ INTERNAL BYPASS



Thinking Outside the Concrete Box.[™]

24 Corliss Street, Suite 0092, Providence, RI 02940 (401) 626-8999 www.storm-tree.com

THIS DESIGN, DRAWING, AND TECHNOLOGY IS PROPRIETARY AND THE PROPERTY OF STORMTREE, AND MAY NOT BE ALTERED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF STORMTREE. PATENT # US 8,333,880; 10,663,302; OTHER PATENTS PENDING.